

PUBLIC WORSHIP

Love Thy Neighbor 2026

Production Proposal — Vendor Response Form

THIS IS A WORKED SAMPLE. Cedar & Signal Live Sound is a fictional company invented to show what a complete, well-answered proposal looks like. The gear, crew, links and prices are illustrative only — not a real bid, not a quote, and not a recommendation of any vendor or product.

Public Worship is seeking a production partner for Love Thy Neighbor 2026, a free outdoor worship block party at the Bandshell in Central Park, for an expected 500 people. Three guest worship leaders play with a full band from the Bandshell's stage; there is a prayer station, a welcome area, food, and spoken segments that have to reach the back of the crowd. The program runs 3:00–6:00 PM, and everything must be fully set up by 1:00 PM.

This form is the response to the production rider. Sections 1–3 confirm you can meet the minimum specification. Sections 4–9 are yours — we do not tell you what gear to bring or how to patch it. Tell us what you would deploy and how you would get it to the Bandshell with no vehicle access. Video and lighting are not required — but if you do them, we welcome a separately priced proposal for either or both.

Type into this PDF or print and complete by hand, then send it to events@publicworship.life. Attach additional pages wherever the space runs out — we would rather have a fifth page of logistics detail than a tidy blank.

SECTION	WHAT IT COVERS	WHO FILLS IT IN
1	Your details	Vendor
2	Minimum specification — meets / exception	Vendor
3	Schedule acknowledgement	Vendor
4	Gear list	Vendor — free-form
5	Patch / input list	Vendor — free-form
6	Stage plot & site diagram	Vendor — free-form
7	Logistics plan	Vendor — free-form
8	Crew, with resume / portfolio links	Vendor
9	Power plan	Vendor
10	Pricing	Vendor
11	Insurance, references & sponsorship	Vendor
12	Signature	Vendor

SECTION 1

Your details

COMPANY / TRADING NAME		YEARS OPERATING
Cedar & Signal Live Sound LLC		9 years
PRIMARY CONTACT		ROLE
J. Okafor		Owner / FOH Engineer
PHONE	EMAIL	
(000) 555-0142	bids@cedarandsignal.example	
WEBSITE / PORTFOLIO		ENTITY TYPE
cedarandsignal.example/portfolio		LLC, state-registered

SECTION 2

Minimum specification

Every line below is a floor, not a wish. A proposal that misses one is not a cheaper proposal — it is a different event. If you are taking an exception, say so here rather than leaving us to find it at sound check.

#	MINIMUM REQUIREMENT	MEETS?	HOW YOU MEET IT — OR WHAT YOU PROPOSE INSTEAD
M1	Full band backline — drums, keys, guitar amp, bass amp Complete kit with hardware, throne and rug; 88-key stage piano with stand, pedal and PSU; guitar amp; bass amp. Shared across all three worship sets.	Yes	Yamaha Stage Custom 5-pc, Nord Piano 5 88, Fender Blues Jr, Ampeg BA-210. Cymbals included; drummers welcome to bring their own snare and pedal.
M2	MD-to-band in-ear monitor system Personal in-ear mixing for the band with a dedicated Musical Director talkback channel into the band's ears.	Yes	Behringer X32 + P16 system, 6 stations. MD gets a dedicated talkback mic routed to all P16s and nothing else.
M3	Wedge monitors for vocalists Floor monitors covering all downstage vocal positions, on their own mixes.	Yes	4x QSC K12.2 wedges on 2 independent mixes across 4 vocal positions.
M4	A sound system that covers the park Full-range music and intelligible speech across the whole permitted footprint, for 500 people in front of the Bandshell.	Yes	L/R stacks of 2x RCF HDL 6-A per side over 2x SUB 8004-AS, plus a delay pair at 90 ft. Measured with Smaart at the site walk.
M5	Power distribution that can run all equipment There is no shore power. Generator(s), distro, fuel for the full day and a plan for what happens if one fails.	Yes	2x Honda EU7000is inverter generators (7,000 W cont. each). Measured peak draw 3,850 W. Audio on Gen 1, everything else on Gen 2; either can carry the full audio load alone.
M6	Skilled mixing engineer operator(s) — resume/portfolio linked Named, with a live link to a resume, reel or portfolio. Not 'an engineer will be assigned'.	Yes	2 engineers named in Section 8, both with portfolio links.
M7	Stagehands — resume/portfolio linked Named crew responsible for moving and setting up ALL production equipment, on site and off.	Yes	4 stagehands named in Section 8. Cedar & Signal handles 100% of load, build, strike and reload.
M8	Truck, dollies and a carry crew There is usually no permit to bring a vehicle into the park. Everything is dollied in from the nearest legal vehicle stop and back out again.	Yes	16 ft box truck, 6 four-wheel dollies, 2 stair-capable hand trucks. Carry route surveyed at the site walk.

#	MINIMUM REQUIREMENT	MEETS?	HOW YOU MEET IT — OR WHAT YOU PROPOSE INSTEAD
M9	Set up by 1:00 PM; strike immediately at 6:00 PM The event runs 3:00–6:00 PM. Setup must be COMPLETE – built, patched, line-checked – by 1:00 PM, two hours before start. Plan your call time so you are wheeling in by 11:00 AM at the latest. Strike begins the moment the event ends.	Yes	Crew call 10:00 AM, first dolly moving 10:30; system line-checked at 12:45 and handed over at 1:00 PM. See logistics plan, Section 7.

SAMPLE

SECTION 3

Schedule acknowledgement

The program runs 3:00 to 6:00 PM. The hard requirement: setup complete — built, patched, line-checked — by 1:00 PM, two hours before start. That means wheeling in from the vehicle stop should begin by 11:00 AM at the latest; your call time is your call, and earlier is smart. Strike begins immediately at 6:00 PM — the park permit does not allow a slow pack-out.

MILESTONE	TIME	YOUR COMMITTED TIME	NOTES
Load-in begins — wheeling in from the vehicle stop	11:00 AM latest	10:30 AM	Crew call 10:00 to give ourselves margin for the carry.
Generators sited and running	—	11:15 AM	Power live before anything else lands.
Setup COMPLETE — built, patched, line-checked	1:00 PM sharp	12:45 PM	Handed to the artists for sound check at 1:00.
Sound check with the worship leaders	1:00–2:30 PM	1:00–2:30 PM	Three bands; one saved scene each.
Program	3:00–6:00 PM	3:00–6:00 PM	
Strike begins	6:00 PM — immediately	6:00 PM	Stage first; PA and playback last, through food service.
Site clear, truck loaded	—	7:15 PM	All tape lifted, nothing left in the park.

If the 11:00 AM–1:00 PM build window is not enough for your system, tell us the call time you actually need — we would rather move load-in earlier than discover the problem on the day.

IS THE BUILD WINDOW WORKABLE? WHAT CALL TIME DO YOU NEED?

Yes — we call crew at 10:00 AM, wheel at 10:30, and build to 12:45 so the 1:00 PM handover has margin.

SECTION 4

Gear list

Everything you would bring. Add pages as needed.

CATEGORY	MAKE & MODEL	QTY	NOTES
PA	RCF HDL 6-A line array module	8	4 per side, ground-stacked on subs
PA	RCF SUB 8004-AS subwoofer	4	2 per side, cardioid-configured
PA	RCF ART 932-A delay fill	2	On stands at 90 ft, time-aligned
Control	Behringer X32 Compact + S16 stage box	1	24 mic in, 6 aux, scene recall
Control	iPad + dedicated router	1	Walk-the-lawn mix check
Monitors	Behringer P16-M + P16-D distributor	6	MD talkback on a dedicated bus
Monitors	QSC K12.2 wedge	4	2 mixes
Backline	Nord Piano 5 88 + Z-stand, pedal, PSU	1	Stereo DI out
Backline	Yamaha Stage Custom 5-pc + hardware, throne, rug	1	Cymbals: Zildjian A set incl.
Backline	Fender Blues Jr IV guitar amp	1	
Backline	Ampeg BA-210 bass combo	1	DI out to stage box
Mics	Shure Beta 58A	4	Vocals, windscreens fitted
Mics	Shure SLXD24/B58 wireless	2	1 host, 1 spare, coordinated
Mics	Shure Beta 52A / SM57 / KSM137 pair	4	Kick, snare, overheads
Mics	Radial ProDI / ProD2 active DI	8	Keys, bass, acoustic, playback, spares

CATEGORY	MAKE & MODEL	QTY	NOTES
Mics	K&M tall boom / short boom stands	12	Round base for grass
Power	Honda EU7000is inverter generator	2	7,000 W cont., 58 dBA @ 23 ft
Power	50 A distro + GFCI spider boxes	1	Outdoor rated, bonded per mfr
Power	100 ft 10-ga feeder + cable ramps	6	All path crossings matted
Site	16 ft box truck / 6 dollies / 2 hand trucks	1	Carry crew of 4
Site	10x10 ballasted canopy	2	FOH and backline weather cover

SAMPLE

SECTION 5

Patch / input list


Your proposed channel list. We have deliberately not prescribed one — the band configuration is drums, keys, bass, guitar and up to four vocalists, plus a host microphone and an MD talkback. Show us how you would cover it.

CH	SOURCE	MIC / DI	STAND	MONITOR SEND
1	Kick	Beta 52A	Short boom	—
2	Snare	SM57	Short boom	—
3	OH L	KSM137	Tall boom	—
4	OH R	KSM137	Tall boom	—
5	Bass	DI from combo	—	P16 #1
6	Keys L	Radial ProD2	—	P16 #2
7	Keys R	Radial ProD2	—	P16 #2
8	Acoustic gtr	Radial ProDI	—	P16 #3
9	Electric gtr	SM57 on amp	Short boom	P16 #4
10	Lead vocal	Beta 58A	Tall boom	Wedge 1 + P16 #5
11	Vocal 2	Beta 58A	Tall boom	Wedge 1
12	Vocal 3	Beta 58A	Tall boom	Wedge 2
13	Vocal 4	Beta 58A	Tall boom	Wedge 2
14	Host / speaker	SLXD24 wireless	Straight	Wedge 1 + 2
15	MD talkback	SM58	Short boom	All P16 only
16	Spare wireless	SLXD24	—	—
17-18	Playback L/R	Radial ProD2	—	—
19-24	Spare	—	—	—

SECTION 6

Stage plot & site diagram

Top-down, audience at the bottom. The Bandshell has a real stage — you are not building one. Show PA position, backline, vocal positions, monitors, FOH position, generator siting and the cable runs between them. Attach your own drawing if you have one — this box is here so you are not forced to.

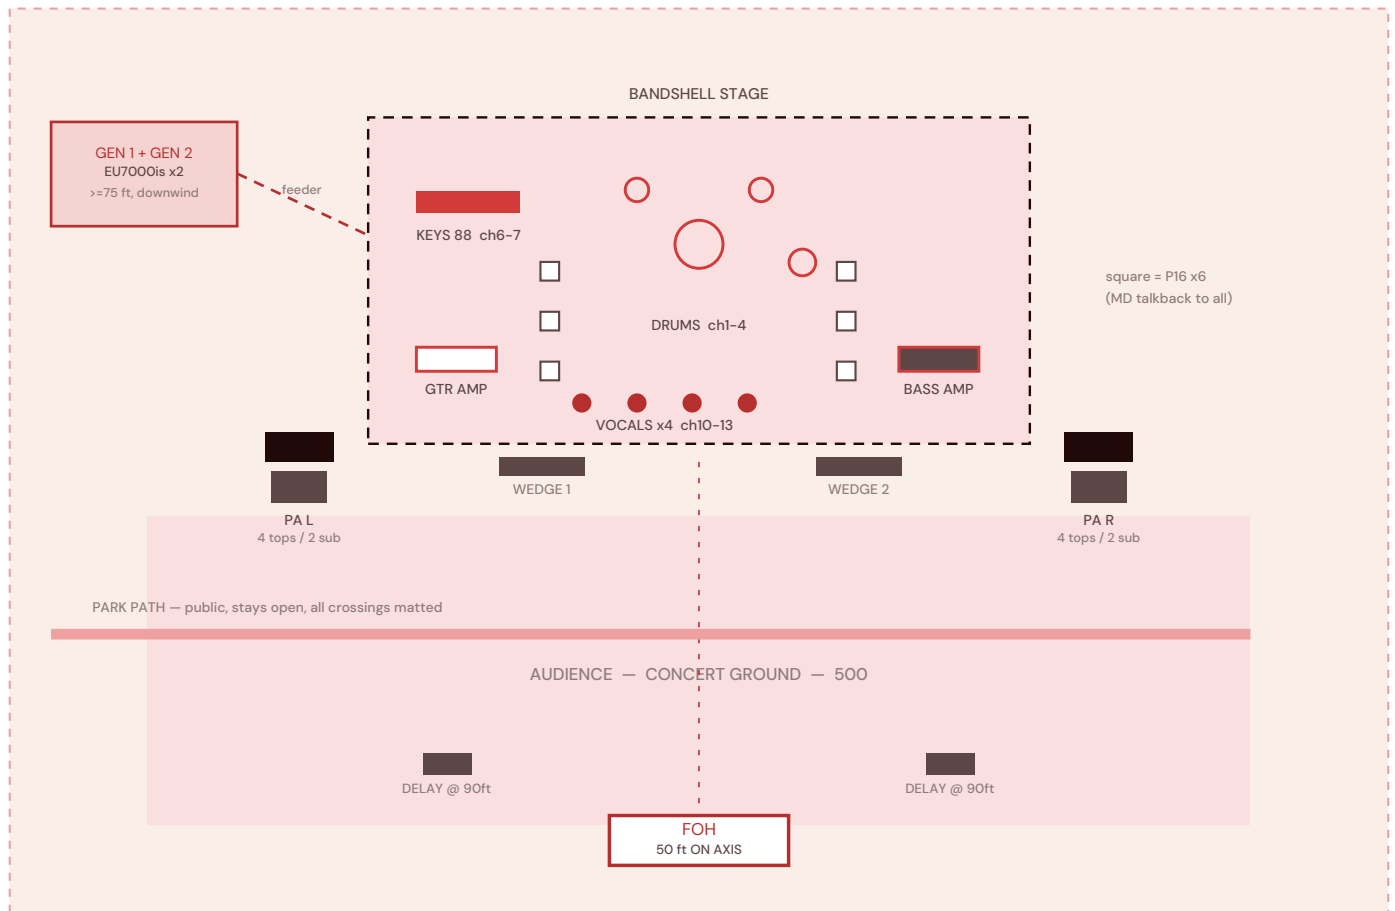

NOTES ON THE PLOT

PA outside the performance area, angled off the residential frontage. Delay pair at 90 ft covers the back third. FOH on axis, in the audience. Generators 75 ft out, downwind, barriered.

SECTION 7

Logistics plan

There is usually no permit to bring a vehicle into the park. Assume everything is dollied in from the nearest legal vehicle stop and dollied back out. Tell us how you would do it: truck, dollies, carry crew, route, sequence, timings, and how you strike at the end.

Vehicle stop and carry route. We survey the carry route at the site walk and confirm the nearest legal stopping point in writing before contract. Truck parks at the stop; nothing enters the park.

Carry plan. 6 four-wheel dollies and 2 stair-capable hand trucks. Everything is cased and dolly-loaded, nothing is hand-carried loose. Estimated 5 dolly round trips at roughly 12 minutes each with a crew of 4. Generators go first so power is live before anything else lands.

Build sequence. 10:00 AM crew call at the vehicle stop; 10:30 first dolly moving. 11:15 generators sited, barriered and running. 12:00 PA stacked and powered. 12:30 backline and stage patch complete on the Bandshell stage. 12:45 full line check done; 1:00 PM the system is handed to the artists for sound check. We build to a 12:45 finish so the 1:00 PM requirement has margin, not hope.

Strike. Strike begins at 6:00 PM, the moment the event ends. Stage and backline first, PA and generators last so playback stays up for food service. Cases staged at the carry point, dollied out, truck loaded. Estimated 75 minutes to a clear site — out by 7:15 PM. All tape lifted, nothing left in the park.

Weather. The Bandshell covers the stage; FOH and generators go under ballasted canopies. Tops strapped to stands. We call a stop for lightning; the Event Lead calls a stop for anything else.

TRUCK / VEHICLE	DOLLIES & HAND TRUCKS	CARRY CREW SIZE
16 ft box truck	6 dollies, 2 hand trucks	4
ESTIMATED LOAD-IN DURATION	ESTIMATED STRIKE DURATION	SITE CLEAR BY
2 h 15 m (10:30–12:45)	75 min	7:15 PM

SECTION 8

Crew

Name everyone who will be on site. A resume, reel or portfolio link is required for every engineer and every stagehand — "an engineer will be assigned" is not an answer we can evaluate. If anyone is subcontracted, say so; we are not against it, we just want to know who is standing behind the console before the day.

NAME	ROLE	EXPERIENCE	RESUME / PORTFOLIO LINK
J. Okafor	FOH engineer	9 yrs	cedarandsignal.example/jo
R. Alvarez	Monitor / stage tech	6 yrs	ralvarez-audio.example
T. Boateng	Stagehand lead	5 yrs	cedarandsignal.example/crew
M. Silva	Stagehand	3 yrs	cedarandsignal.example/crew
D. Whitfield	Stagehand	2 yrs	cedarandsignal.example/crew
A. Ngo	Stagehand	4 yrs	cedarandsignal.example/crew

ANY SUBCONTRACTED CREW? WHO, AND FOR WHAT?

None. All six are Cedar & Signal staff.

SECTION 9

Power plan

There is no shore power at this site. Be specific — this is the part of the package most likely to go wrong and least likely to be spelled out in a quote.

GENERATOR MAKE & MODEL		RATED CONTINUOUS WATTS, EACH
Honda EU7000is (x2)		7,000 W
INVERTER TYPE? (CLEAN SINE)	NOISE RATING	YOUR CALCULATED PEAK DRAW
Yes — inverter	58 dBA @ 23 ft	3,850 W

FUEL PLAN — FULL DAY + RESERVE

Full day + 50% reserve in sealed cans, barriered, fuelled to full before 3:00 PM; no refuelling during the program.

IF A GENERATOR FAILS MID-PROGRAM, WHAT HAPPENS?

Either unit carries the full audio load alone. Audio transfers to Gen 2 in under two minutes; FOH and the host mic come back first.

GFCI, GROUNDING & BONDING APPROACH

GFCI spider boxes on all outdoor circuits; bonded per Honda spec; weather-rated connections; all path crossings ramped.

SECTION 10

Pricing

Itemised, please. Our target for the required scope is \$3,500 all-in including transport, fuel, crew and taxes — stated openly so you can quote scope rather than guess at a number. Price optional items separately so we can take them or leave them. Video and lighting are not required — if you offer either, add them here as their own priced options.

LINE ITEM	BASIS	PRICE
Labor — FOH engineer	1 x 9 hr day	\$525
Labor — monitor / stage tech	1 x 9 hr day	\$450
Labor — stagehands	4 x 5 hr call	\$600
PA system incl. delay fills	Day rate	\$700
Console, stage box, control	Day rate	\$180
Monitors — 6x P16 + 4 wedges	Day rate	\$220
Microphones, DI, stands, cable	Day rate	\$185
Backline — drums, keys, gtr amp, bass amp	Day rate	\$310
Generators (2), distro, ramps	Day rate	\$180
Fuel — full day + 50% reserve	Estimate	\$60
Truck, dollies, transport both ways	Flat	\$140
Multitrack recording + delivery	Option — offered	\$0 (included)
Stage lighting — LED wash for the dusk close	Option — offered	\$300
Two-camera video capture + edited recap	Option — offered	\$650
TOTAL, ALL-IN (INCL. TRANSPORT, FUEL, TAX)		\$3,450
OVERTIME THRESHOLD & RATE		After 10 hrs, \$65/hr per head
DEPOSIT TERMS		QUOTE VALID UNTIL
50% on signature, 50% on load-out		30 days from issue

SECTION 11

Insurance, references & sponsorship

Insurance

■ We can provide a Certificate of Insurance naming Public Worship and the City Parks Department as additional insured, before load-in.

GENERAL LIABILITY LIMIT	WORKERS' COMP
\$2,000,000 aggregate / \$1,000,000 occurrence	Yes — staff covered

References — two comparable outdoor, generator-powered events.

EVENT & YEAR	CLIENT	CONTACT
Riverside Summer Sessions 2025	Riverside Arts Council	name / phone / email
Eastside Block Fest 2024	Eastside BID	name / phone / email

Sponsorship — one company handles ALL of production. Either you provide the entire package in kind and are recognised as the event's Production Sponsor, or this is a cash bid — we do not split production across sponsors.

■ Cash bid

■ Full production sponsorship — the whole package, in kind

Sample note: we would consider full sponsorship in exchange for the recognition package in the rider, subject to our fall calendar.

SECTION 12

Signature

By signing, you confirm that the exceptions in Section 2 are complete — that there is nothing else in the minimum specification you cannot meet.

SIGNATURE	PRINT NAME
J. Okafor	J. Okafor
ROLE	DATE
Owner / FOH Engineer	

SAMPLE